

RECOMENDED SERVICE BULLETIN

NO. RSB 40-052

NO. RSB D4-069

NO. RSB F4-018

I TECHNICAL DETAILS

I.1 Category

Recomended.

I.2 Airplanes affected

Type: DA 40 /D /F

Serial Numbers: 40.006 through 40.009,
40.011 through 40.084,
40.201 through 40.678,
40.680 through 40.687,
40.691 through 40.692,
40.695 through 40.698, 40.700,
40.DS001 through 40.DS019,
40.FC001 through 40.FC029,
D4.001 through D4.418

I.3 Time of Compliance

At holders discretion.

I.4 Date of Effectivity

27-Nov-2009.

I.5 Subject

Seal between the firewall shield and the fuselage.

ATA-Code: 53-10

I.6 Reason

A new seal cover has been approved, which improves the seal of the bond between the firewall shield and the fuselage. The formation of white dust at the bottom edge of the firewall due to moisture in the firewall is prevented.

I.7 Concurrent Documents

None.

I.8 Approval

The technical information or instructions contained in this document relate to the Design Change Advisory No. MÄM 40-381, which has been approved under the authority of EASA Design Organization Approval No. EASA.21J.052.

The technical content of this document has been approved under the authority of DOA No. EASA.21J.052.

I.9 Accomplishment/Instructions

WI-RSB 40-052 / WI-RSB D4-069 / WI-RSB F4-018, latest effective issue, must be complied with.

I.10 Mass (Weight) and CG

Negligible.

II PLANNING INFORMATION**II.1 Material & Availability**

WI-RSB 40-052 / WI-RSB D4-069 / WI-RSB F4-018 and required parts are available through DAI.

II.2 Special Tools

None.

II.3 Labor effort

1 hour (does not include cure times of products used).

II.4 Credit

None.

II.5 Reference Documents

DA 40 Series Airplane Maintenance Manual, Doc. No. 6.02.01, latest effective issue.

WI-RSB 40-052 / WI-RSB D4-069 / WI-RSB F4-018, latest effective issue.

III REMARKS

1. All measures must be carried out by a certified aircraft service station or a certified aircraft maintenance mechanic.
2. All works, particular those that are not especially described in this Service Bulletin, must be carried out in accordance with the referenced maintenance manual.
3. Accomplishment of the measures must be confirmed in the log book.
4. In case of doubt, contact Diamond Aircraft.

**EXECUTION REPORT TO
SERVICE BULLETIN****RSB 40-052****RSB D4-069****RSB F4-018****AIRPLANE DATA**

Airplane Serial Number: _____

Airplane Registration: _____

Airplane Operator: _____

Hours of operation of airplane: _____

No. of landings: _____

Hours of operation-engine _____

Typical operation of airplane: private, club, training, other _____

Date, Name, SignPlease fax the completed form to Fax No. +43-2622-26700-1369 or e-mail to
airworthiness@diamond-air.at

WORK INSTRUCTION

WI-RSB 40-052

WI-RSB D4-069

WI-RSB F4-018

“INSTALLATION OF FIREWALL EDGE GUARDS”

I GENERAL INFORMATION

I.1 Subject:

Improvement of the seal between the firewall shield and the fuselage to prevent moisture ingress.

I.2 Reference Documents:

Diamond Aircraft DA 40 Series Airplane Maintenance Manual, Doc. No. 6.02.01, latest effective issue.

I.3 Remarks:

- a) The work must be carried out by a certified aircraft service station or a certified aircraft maintenance mechanic.
- b) All work (particularly that which is not specifically described in this work instruction) must be carried out in accordance with the referenced maintenance manual.
- c) In case of doubt, contact Diamond Aircraft Industries.

II DRAWINGS, SPECIAL TOOLS & MATERIALS

II.1 Drawings:

DA4-5310-10-00

II.2 Special Tools:


None.



II.3 Materials:

Qty	Description	Part Number
1	Seal Cover	DA4-5310-11-00
a/r	Sealant	Terostat-9100 1K-PUR
a/r	Fire retardant paint	Acc. to AMM
a/r	Finishing varnish	Acc. to AMM

III INSTRUCTIONS

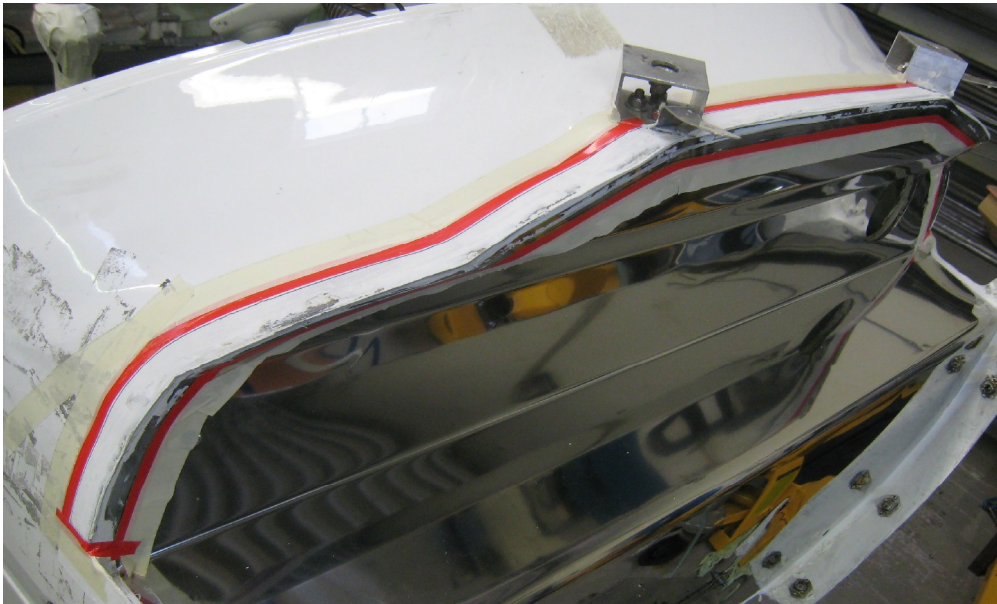
Installation

1	Remove upper and lower cowlings acc. to AMM Section 71.
2	Check that the new seal cover fits proper to the fuselage as shown on drawing DA4-5310-10-00.
3	If it is necessary to trim the seal cover to fit tight to the fuselage, cut small slots into the flange of the seal cover.
4	<p>Mark the outline of the seal cover with masking tape.</p> 


5	Grind off fire-paint from the exterior of the fuselage within the outline of the seal cover.
6	Clean surface from dirt and grease. Surface should be solvent wiped and then wiped dry. Refer to AMM Section 51-30.
7	<p>Install seal cover with Terostat 1K-PUR sealant.</p> 
8	<p>Hold seal cover in place with masking tape during cure.</p> 
9	Cure i.a.w. the instructions listed on the Terostat 1K-PUR sealant.
10	After cure, remove the masking tape and excess sealant around the edges.

11	Coat sealant joint and seal cover with fire resistant paint, in acc. with drawing DA4-5310-10-00 and AMM Section 51-30. NOTE: Apply fire protective paint with 5 mm (0.2 in) excess.
12	Clean working area and check for foreign objects.
13	Install upper and lower cowlings acc. to AMM Section 71.
14	Test all systems in working area for function.
15	Make necessary entries into aircraft logs.

REVISION					
REV	SH	ZONE	DESCRIPTION	DATE	APPROVAL
-	01	ALL	MÄM 40-381 NEW DRAWING, DOES NOT SUPERSEDE ANOTHER DRAWING.	20.04.09	SEE TB

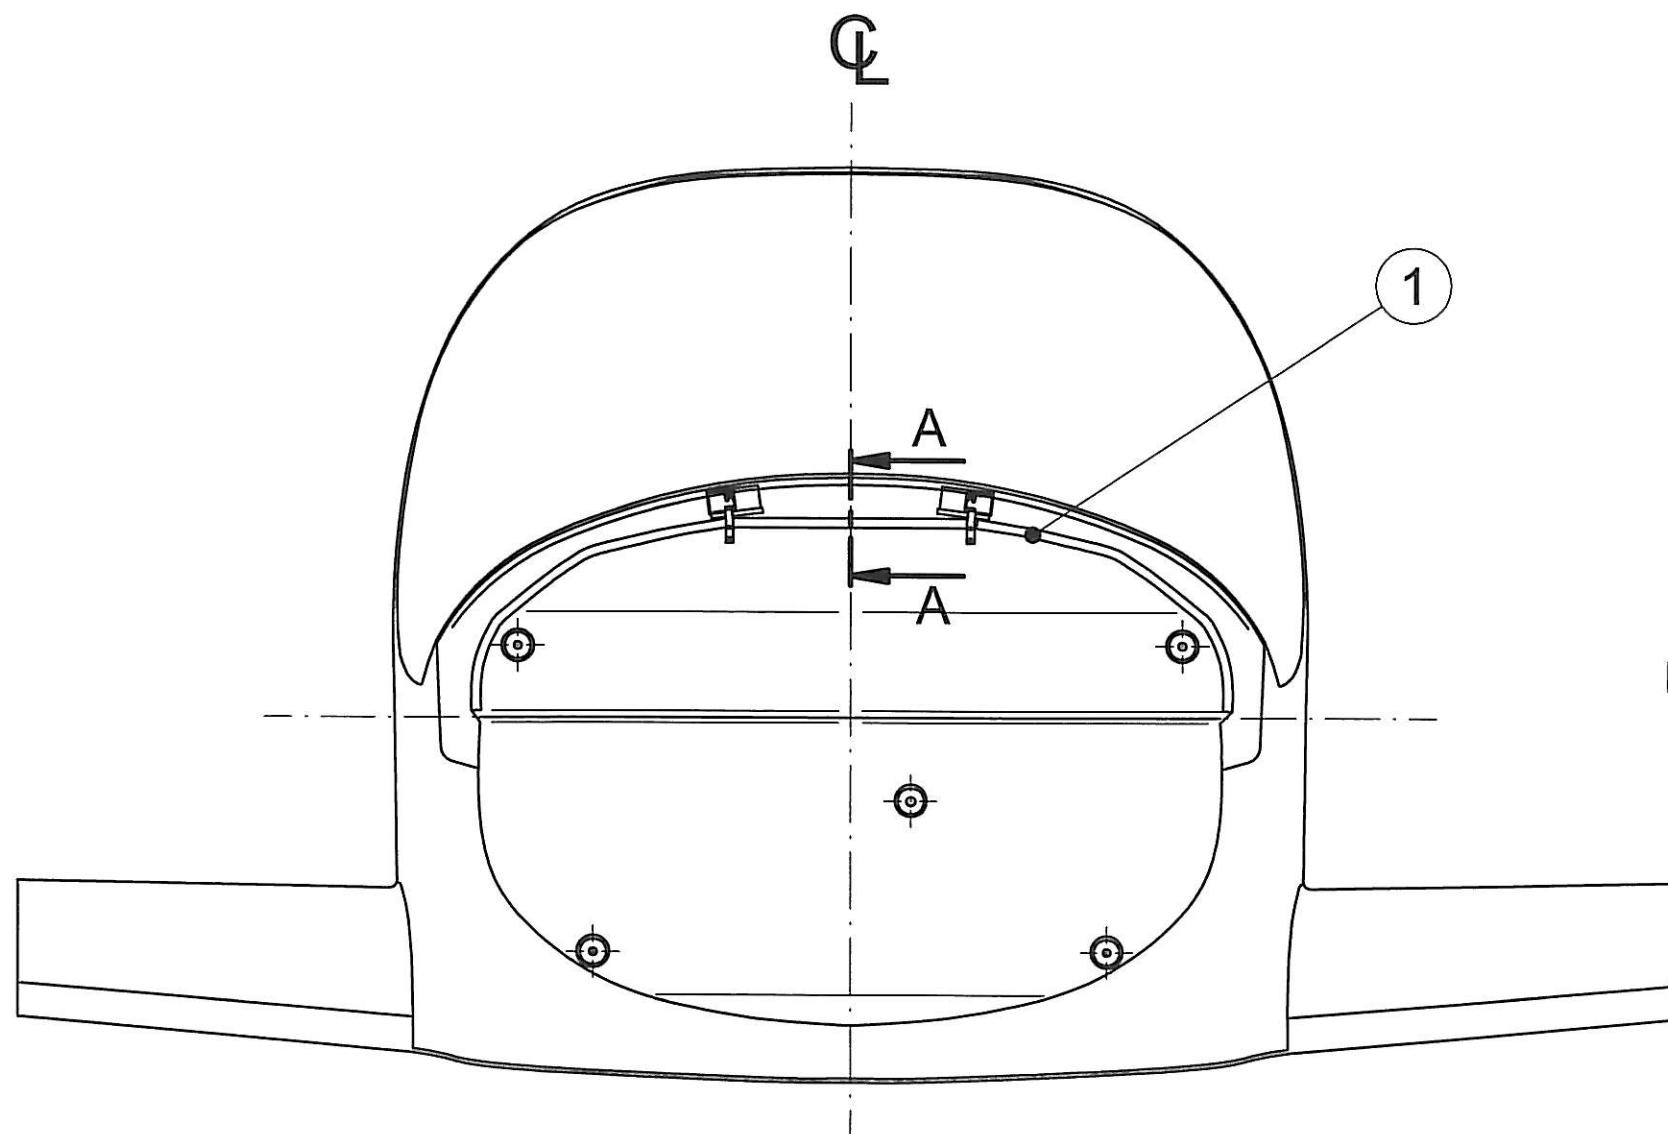

SECTION A-A
1:1

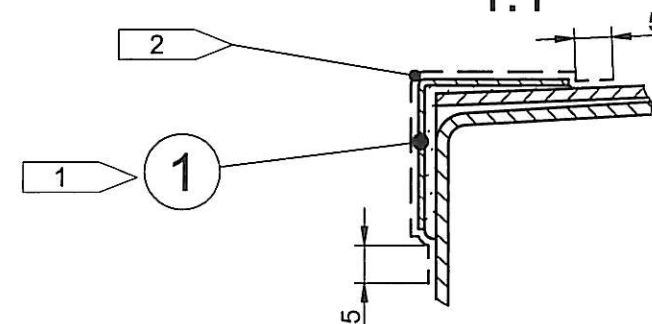

FLAG NOTES

- 1 PASTE UP WITH TEROSTAT 1K-PUR - FA. TEROSON
- 2 PROTECT SURFACE WITH FIRE PROTECTION PAINT
ACCORDING TO DPS 14 CHAPTER 1

1	1	DA4-5310-11-00	SEAL COVER								
ITEM	QTY	PART NUMBER	DESCRIPTION	MATERIAL TYPE	H.T.	MATERIAL SIZE	SPECIFICATION	REMARK			
DIMENSIONS METRIC			IDENTIFICATION MARKINGS	Diamond Aircraft Industries							
FIRST ANGLE PROJECTION 			DE-S-10-00003	N. A. Otto-Straße 5 A-2700 Wiener Neustadt							
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM			CLASSIFICATION: NONE	DEPARTMENT	SIGN	DATE	PROJECT	DA 40			
DIMENSION TOLERANCES			INTERCHANGEABLE PART NO	DRAWN	M. Scheikl	20.04.09	TITLE	SEAL COVER - INSTALLATION			
2 DECIMAL	±0,25	3.2 FINISH IN MICRO- METER	THIS DRAWING WAS PRODUCED USING	CHECKED	B. Jäger	05.05.09	DAIA DA4-5310-10-00				
1 DECIMAL	±0,5		SOFTWARE: SOLID EDGE V18	QA:	N/A						
DECIMAL	±1		FILENAME	STRESS:	N/A						
ANGLE	±1°		DA4-5310-10-00.dft	MANUF.:	N/A						
RAD	±0,5			SYSTEM:	N/A		DWG.ORIG.	DWG.NO.	REV		
				APPROVED:	C. Jütte		DAIA	DA4-5310-10-00	"-"		
							CODE	710197	SCALE 1:10		
							SH	01	OF 01		